

MiTek[®]

Timber Engineering Machinery

Strut-Runner

Posi-Joist Press

POSI-JOIST PRESS



- Hydraulic system delivers 15 tonnes of force at high pressure with a lower alternate setting of your choice for faster operation
- The electronic "teach" system programs the press to automatically repeat the pressing sequence
- 630mm wide, 15m long and 830mm high pressing platform

Shaping the future




MiTek Strut-Runner

Posi-Joist Press

Technical Data

Table	630mm wide, 15m long and 830mm high
Platten Size	760 x 430mm
Pressure and Capacity	120 bar and 15 tonne with 4kW 3 phase motor, 30 amp supply
Clamping	32 No Pneumatic cylinder with Quick Release. 3 sizes of stop with quick change between sizes. 10 CFM air supply required
Height Adjustment	Motorised lead screw with 2 Button operation and LED display
Web Location	Centre Unistrut channel with locator
Automation	PLC with teach facility. Ability to program left and right. Speed will be 0.8 - 4.0m/sec
Safety	CE Marked. Plexiglass guard with secondary optical guard to activate 'E' Stop circuit

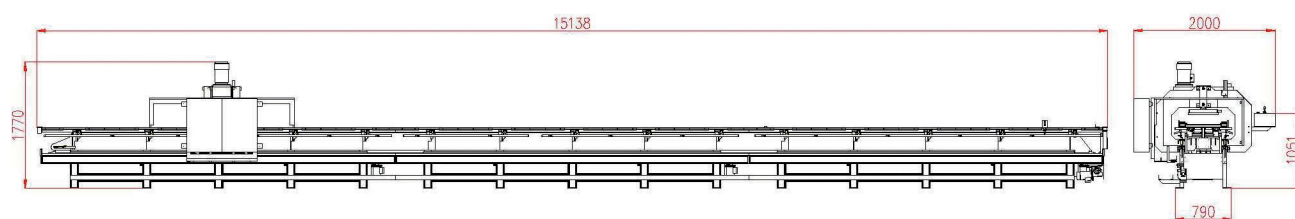

MiTek Industries Ltd

Grazebrook Ind Est, Peartree Lane
Dudley, West Midlands DY2 0XW

Tel (+44) 1384 451400

Contact:

Mr David Thomas - Head of Machinery

Mr Tim Garner - Sales & Marketing Director

Website: www.mitek.co.uk

MiTek®
Shaping the future